



CONSTRUCTION PROJECT INFORMATION FLYER CITY OF ST. AUGUSTINE

Project Goal: San Marco Avenue (A1A) Watermain Replacement

Replace 6,000 feet of 10-inch cast iron main on San Marco Ave. between Cincinnati Ave. and Picolata St. This section of pipeline was source of color and sediment in the northern portions of St. Augustine and suffered frequent breaks and will be replaced with 12-inch high density polyethylene (HDPE) pipe. Pipe bursting technology (trenchless) will be utilized to reduce outages and interruptions.

Project Improvements

Killebrew, Inc. and crews will be furnishing and installing the following items:

- 6,000 lineal feet of 12-inch HDPE Water main
- New water service to 31 Businesses, 1 Church, 1 Hotel and 2 Multi-family properties
- Benefitting over 1,000 customers

Note: Project is to upgrade watermains and services using trenchless technology to minimize interruptions in customer service and traffic flow. Project schedule is coordinated with the Florida Department of Transportation (FDOT) to be completed prior to the scheduled 2018 resurfacing project on San Marco Ave. (A1A) and in close coordination with the May Street/West San Carlos roadway improvements.

Project Approved

By the City Commission on April 2016 Drinking Water Facilities Plan and on September 26, 2016 Resolution 2016-33 for State Revolving Loan Fund Agreement.

Questions Concerning the Project

Project Coordinator: Marcus Pinson
Phone: 904-823-2204 (o)/ 352-359-4122 (c)
E-mail Address: mpinson@citystaug.com

Construction Project Manager: Robert Kermitz, ETM
Phone: 904-535-0979 (c)
E-mail Address: kermitzr@etminc.com

Project Contractor

Killebrew, Inc.
Office Number: 863-701-0273
After Hours Number:

Project Schedule


Start Date: April 18, 2017
Completion Date: February 16, 2018

Project Overview: During the construction phase, the contractor will make every effort to provide access to resident's entrances to driveways, subdivisions and businesses during the day. There may be times when driveways or entrances may be inaccessible, but our intent is to minimize any inconveniences to the local residents and businesses during this project phase, and we ask for your patience as this project progresses. At the end of each weekday, the excavation areas will be backfilled and compacted; and all residential and business driveways should be accessible. The contractor will be videotaping the entire project area prior to starting the construction to verify the existing conditions. The contractor may also be contacting property owners to identify any irrigation systems located within the construction areas. Any damage caused by construction will be repaired by the contractor at no cost to the owner.

Stormwater Utility Friendly Reminder

Help reduce environmental contamination by calling the Public Works Department at 825-1040 and reporting cave-ins, unusual amounts of standing water, clogged drains; illegal disposing of lawn debris, paint, oil, gas or any other items into the drainage system.

CONSTRUCTION PROJECT INFORMATION FLYER CITY OF ST. AUGUSTINE

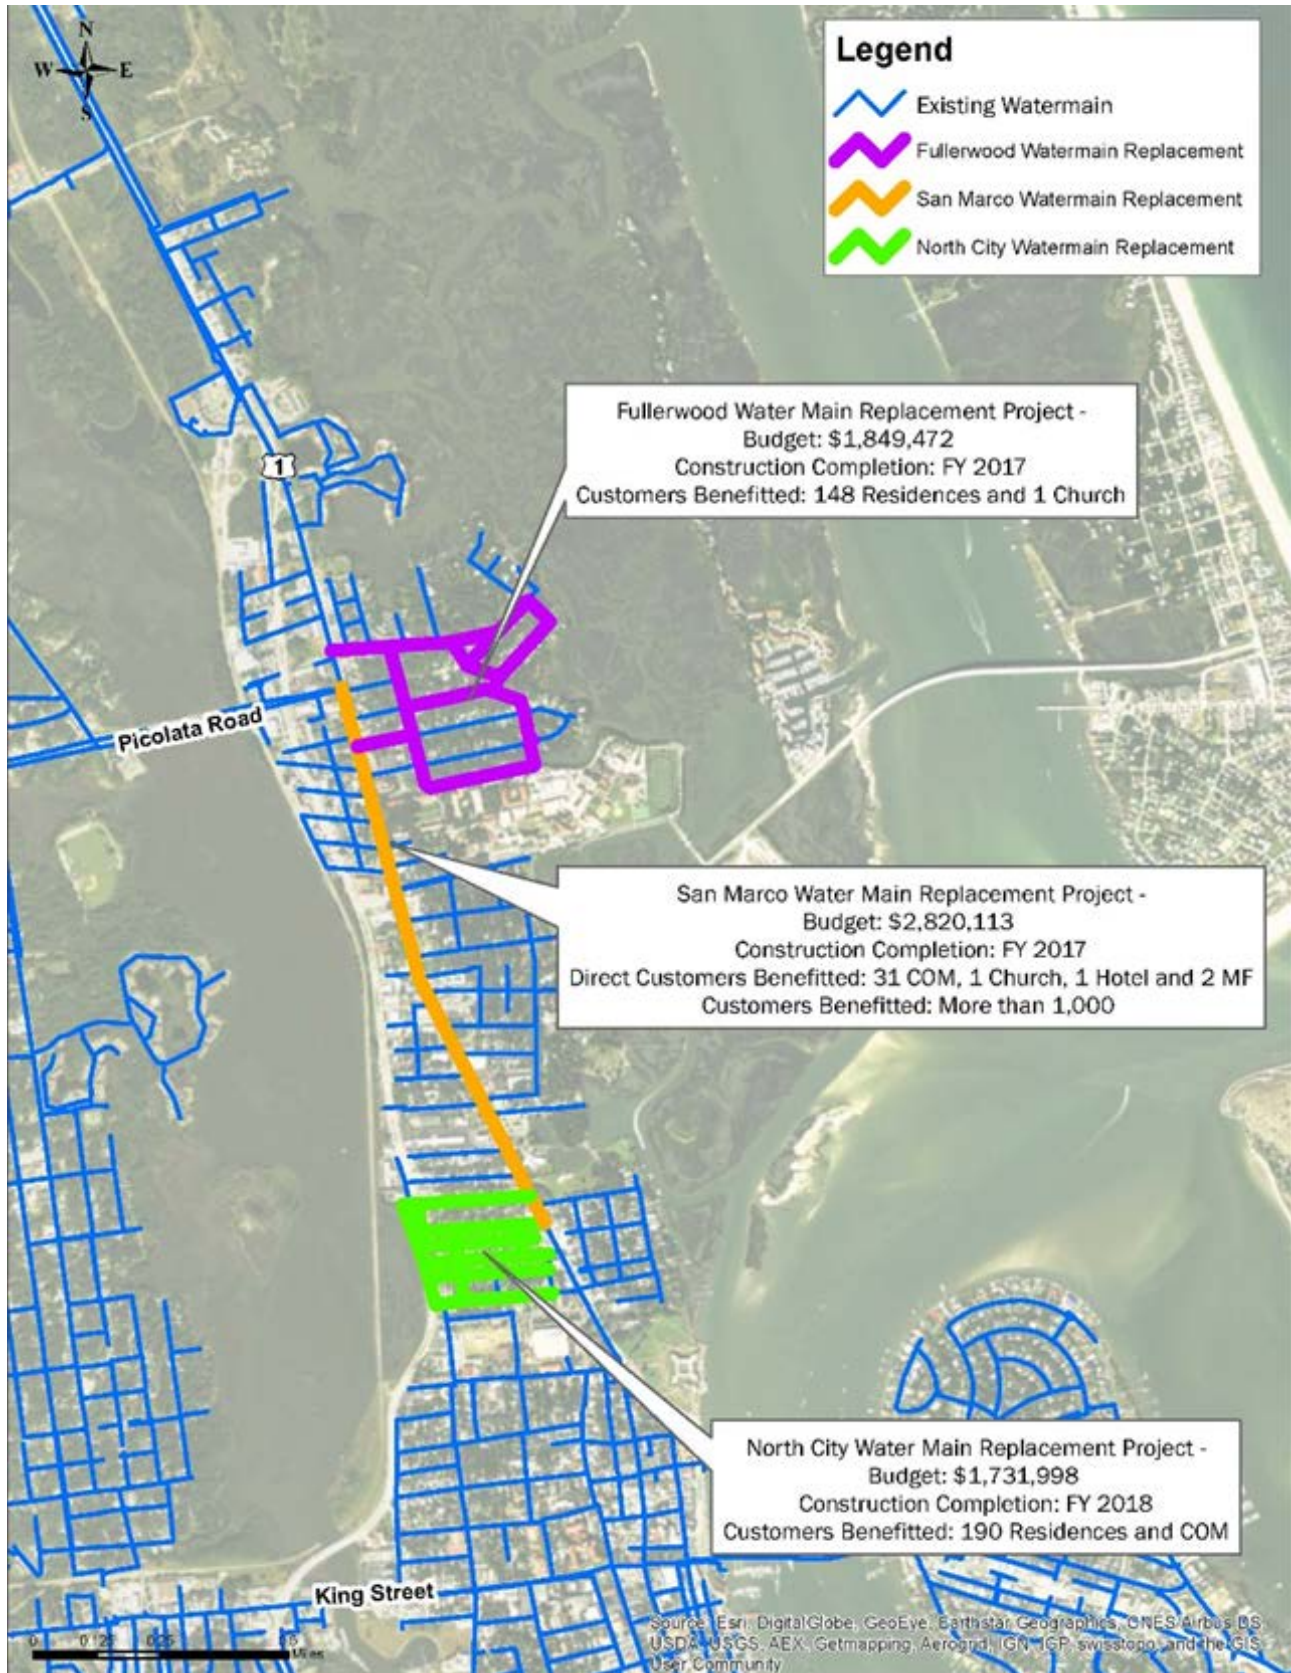

Stormwater Utility Friendly Reminder

Help reduce environmental contamination by calling the Public Works Department at 825-1040 and reporting cave-ins, unusual amounts of standing water, clogged drains; illegal disposing of lawn debris, paint, oil, gas or any other items into the drainage system.